

PTZF/G-EC

Home | Security | Pan & Tilt Systems | Accessories

PTZF/G-EC

Control Unit for Pan/Tilt Head and Lens,

24VAC with Power Supply, RAL7032

Art-Nr. 75354



Main Features

Pan/Tilt Head Fixed Speed Control
Motorzoom Lens Control (zoom, focus)
Easy Operation

External Power Supply Unit 230 VAC
Desktop Housing

Specifications

Lens control output	8 VDC (250 mA max.)
P/T head control voltage	24 VAC (0.8 A max.)
Connectors for lens, P/T head	15-pin / 9-pin (D-Sub)
Supply voltage (power supply)	230 VAC / 24 VAC, 50/60 Hz
Power consumption	25 watts max.
Dimensions (HxWxD)	See drawing
Weight incl. power supply	1.5 kg
Certificates	CE


PTZF/G-EC

Product information


The following cable lengths can be bridged with the control box*: Wire size Approx. Length (m) ** 0,6 mm ø 50 0,8 mm ø 90 0,75 mm² 135 1,5 mm² 270 2,5 mm² 450 * related to 24 VAC P/T heads ** depending on type of P/T head

Technical drawing


Steuergerät/Control unit

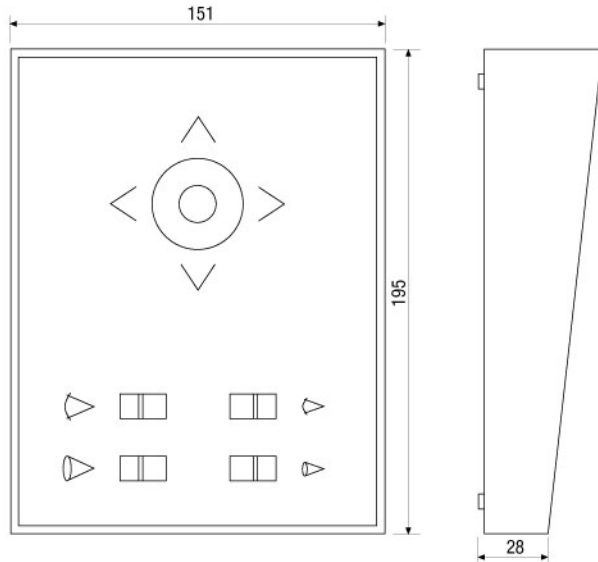

Rückansicht/Back view:

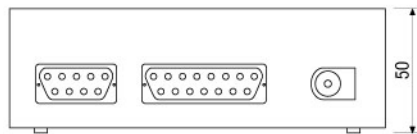

Netzgerät/Power supply

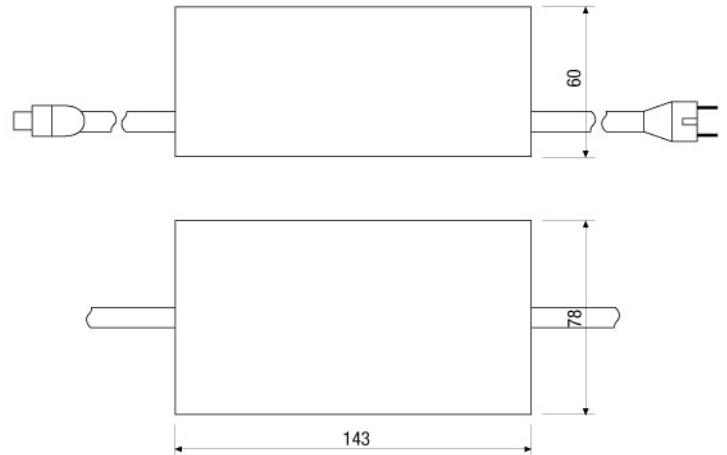

Maße/Dimensions: mm

SLD Security & Communications
The Old Forge, Ockham Lane, Ockham, Surrey GU236PH England
Phone +44.1483225633 · Fax +44.1483225634
sales@sld.co.uk · www.sld.co.uk

