

AVU-8/2EC

Home | Security | Processing | Distributors/Amplifiers

AVU-8/2EC

Video Switcher 8 Inputs,

2 Outputs in Desktop Housing, 230VAC

Art-Nr. 76405



Main Features

8 Camera Inputs

2 Outputs (A and B)

Outputs Selectable as Spot or Sequence

Vertical Interval Switching

Selectable Dwell Time

Programmable Bypass Function

Supply Voltage: 15VAC 50/60Hz

Colour: Pantone Cool Gray 1C

Specifications

| | |
|------------------------|---|
| Video inputs | 8x 1 Vp-p, (C)VBS, 75 ohms, BNC |
| Video outputs | 2x 1Vp-p, (C)VBS, 75ohms BNC (A and B selectable as spot or sequence outputs) |
| Video signal bandwidth | 10MHz +/-3db |
| Bypass function | Manual programmable |
| Event Actions | Available in line-locked systems (cameras and switcher) |
| Signal-to-noise ratio | 60db |
| Temperature range | 0°C ~+35°C |
| Dwell time | 1 ~120sec., adjustable for output A und B |
| Cross talk | 56db at 4.5MHz |
| Supply voltage | 15VAC, 50/60Hz |
| Power consumption | approx. 4.5watts |
| Housing | Steel metal |
| Colour | Pantone Cool Gray 1C |
| Dimensions (HxWxD) | see drawing |

AVU-8/2EC

(Continuation Specifications)

| | |
|-----------------------|------------------|
| Weight | 1.5kg (with PSU) |
| Parts supplied | PSU 230VAC/50Hz |

AVU-8/2EC


Product information

*) Power supply unit 230 VAC/15 VAC included

AVU-8/2EC

Home | Security | Processing | Distributors/Amplifiers

Technical drawing

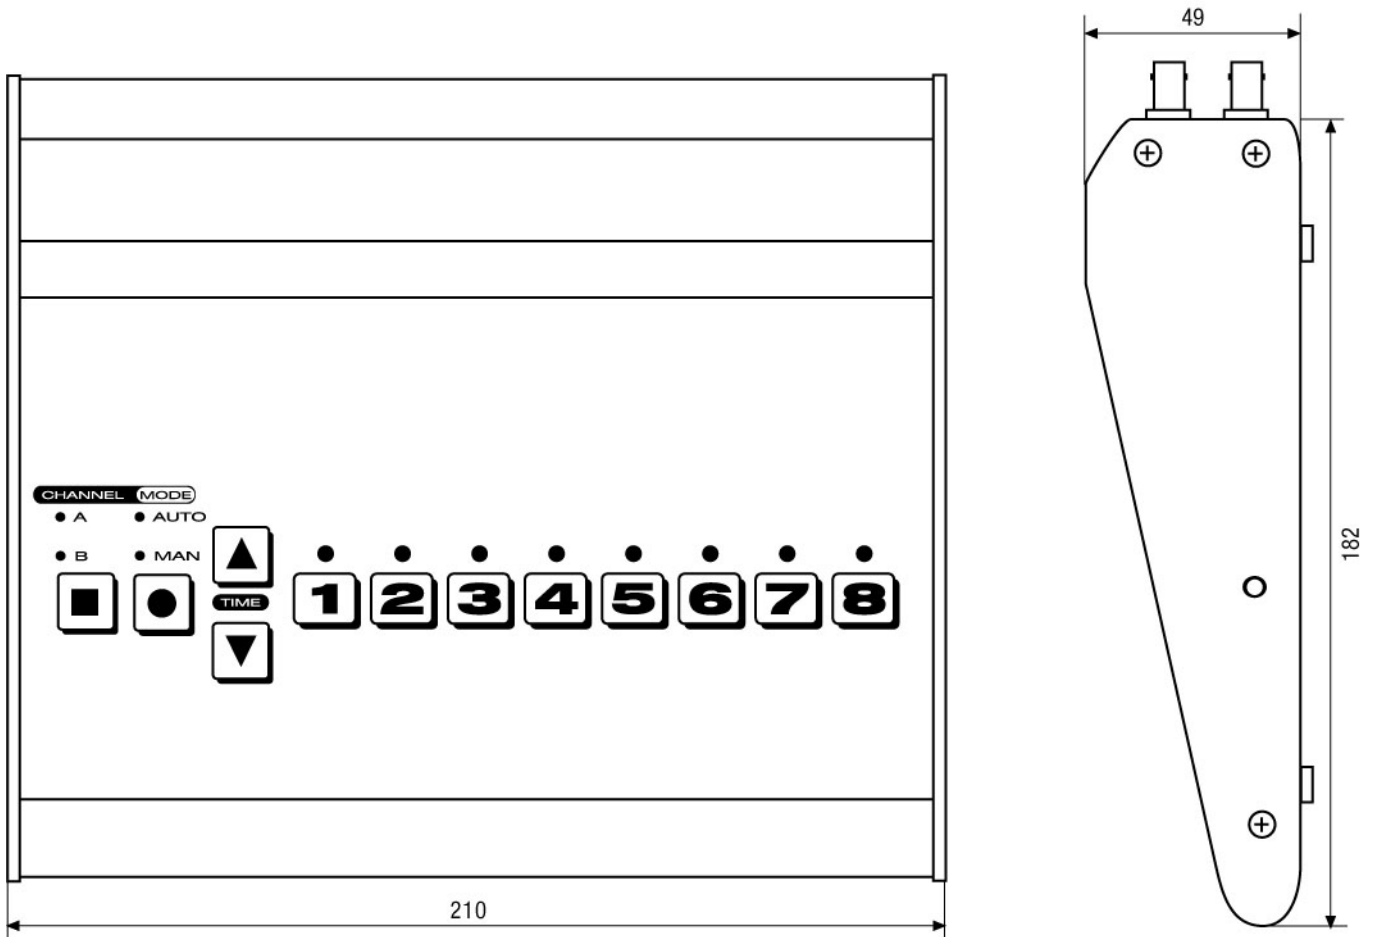

Maße/Dimensions: mm

SLD Security & Communications
The Old Forge, Ockham Lane, Ockham, Surrey GU236PH England
Phone +44.1483225633 · Fax +44.1483225634
sales@sld.co.uk · www.sld.co.uk

